


SITE-LOG LPV-1/LPVB-1

Product Specifications

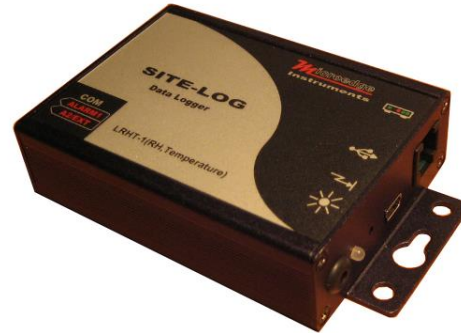

OVERVIEW

The SITE-LOG LPV-1/LPVB-1 is a 7-channel, battery powered, stand-alone voltage data logger, with storage up to 4 MB of data in non-volatile flash memory. Input voltage signals can be from sensors, transducers, transmitters or any other common voltage sources. Its aluminum enclosure makes it excellent in the harshest industrial environment.

Plug & Play USB port and versatile custom equation simplify communications and engineering unit conversion. 16-bit ADC makes it well suited for science and laboratory applications where precise and accurate measurements are critical.

Simply plug the logger to computer's USB port, and the software automatically recognizes it and handles the configuration, downloading, graph viewing and more...

FEATURES

High Data Resolution:

The 16-bit analog-to-digital converter meets most high-resolution requirements.

Large Memory Size:

The 4-Mega-Byte Memory stores years of measurements.



Programmable Input Ranges:

One on-board thermistor channel monitors ambient temperature. Seven range-programmable voltage external input channels cover wide measurement requirements.

Multiple Communication Interfaces:

The SITE-LOG data loggers can be accessed via USB, MODEM, or Ethernet connections with auto baud rate of up to 115 kbps.

Its on-board TTL serial port and USB interfaces meet most communication requirements.

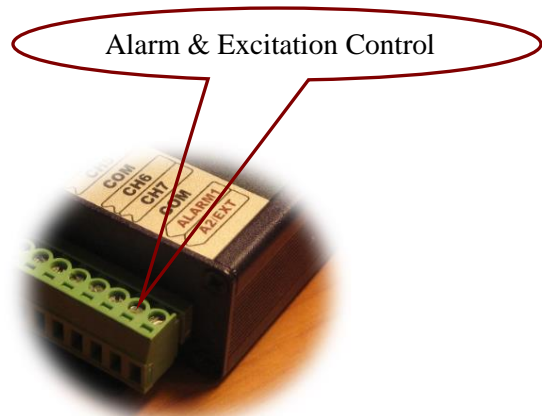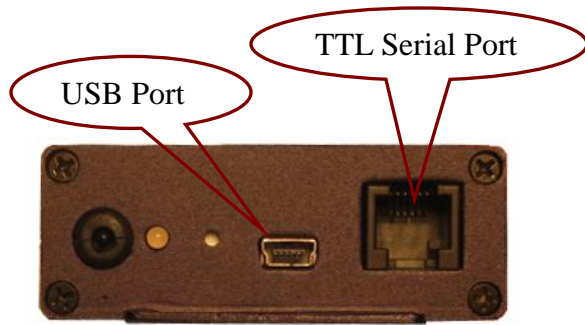

10-Year Battery Life:

The internal lithium battery provides over 10 years of instantaneous logging operation when sampling at an interval of one minute.

Fast Sampling Mode:

The SITE-LOG data loggers can log data with the sampling interval as fast as 20 milliseconds, replacing data acquisition devices.


Alarm and Excitation Outputs:

The SITE-LOG data logger notifies the alarm condition over alarm terminal strips or communication lines. (USB, Serial Port, MODEM)

Excitation control turns on the power of external transmitter/transducer only when the logger is sampling.

Rugged Physical Design:

The rugged aluminum enclosure and coated PCB makes the Site-Log data loggers perfect in the harshest industrial environment.

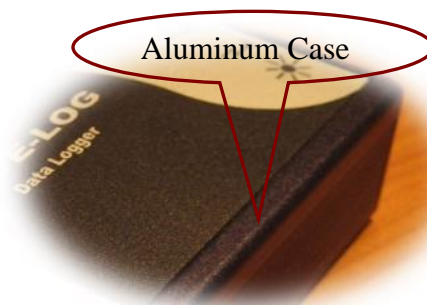

SITEVIEW SOFTWARE FEATURES

SiteView is a PC based application works with Site-Log Series data loggers for downloading, configuration and data analyzing and plotting.

Its user-friendly graphic interface plus powerful functionalities fit both novice and advanced users.

The versatility of custom equation and custom-line equation handle complicated measurement requirements.

Features:

- ❖ Support USB, Serial port and Ethernet connections for easy local and remote access
- ❖ Fast communication speed up to 115200 bps makes downloading fast

- ❖ Real-time view and chart recording replaces chart recording device
- ❖ Custom equation and custom-line equation solves scientific and laboratory algorithm difficulties
- ❖ Zoom in/zoom out, annotation/label of graph functions provide detailed view of data
- ❖ Multiple file loading allows easy data comparison
- ❖ Dynamic statistics provides detailed information of current zoomed view
- ❖ Export to CSV, TXT, BMP, JPG, TIF, PNG, GIF file formats.

The screenshot displays the SiteView software interface for a Site-Log LPVB-1 device. The main window is titled "SiteView by Microedge Instruments" and includes a menu bar (File, View, Tools, Help) and a toolbar with options like Unit Category, Equation, Custom-Line Equation, Plot Preferences, and Special characters. The interface is divided into several sections:

- Left Panel:** Contains "Contact Scan" and "USB Port" sections. The "USB Port" section shows the device "Site-Log LPVB-1 (S/N: 01070101)". Below it, "USB:24 Properties" are listed, including "Baud Rate: 115200 Bits/second" and "Timeout: 5000 Milliseconds".
- Top Center:** Shows the device name "Site-Log LPVB-1 (S/N: 01070100649)" and buttons for "Real-Time", "Refresh", "Download", "Clear", and "Configure".
- General Settings:** Includes a checkbox for "LED light when sampling", a "Description" field with "New Logger", "Sampling Interval" set to "1 Minute", "Start Time" of "6/29/2013 11:19:52 PM", and "End Time" of "6/29/2013 11:22:52 PM".
- Logging Method:** Shows "Overwrite oldest data w", "Total Memory" of "2095104 Readings", and "User Selected Memory" of "2095104 Readings".
- Configuration Dialog:** A separate window titled "Loggers Configuration Site-Log LPVB-1 (S/N: 01070100649)" is open, showing settings for "New Logger", "Sampling Interval", "On Board LED", "When Memory Full", and "Memory Usage".
- Graph View:** A window titled "Graph View" shows a real-time plot of "Current (mA)" vs "Time". It features a red line for the current and a blue line for a custom equation. A callout box points to the graph with the text "Graph View".
- Equation Editor:** A window titled "Equation Editor" shows a code editor with the following text:


```

      calculate dew point based on ch0: temperature
      double DewPointEquation(double Input)
      double logExp
      double logExp = Channels[1].Measurement;
      double rh = Channels[1].Measurement;
      double dew_point = DewPoint(temperature, rh);
      return dew_point;
      
```

 A callout box points to the editor with the text "Equation Editor".
- Tabular View:** A window titled "Tabular View" shows a table of logged data:

Time	#0: CH0 [°C]	#1: CH1 [mV]	#2: CH2 [mV]
6/29/2013 11:19:52 PM	24.27	0.610	0.305
6/29/2013 11:20:52 PM	24.40	0.610	0.305
6/29/2013 11:21:52 PM	24.37	0.610	0.305
6/29/2013 11:22:52 PM	24.25	0.610	0.305

 A callout box points to the table with the text "Tabular View".
- Real-Time View:** A window titled "Real-Time View" shows a real-time plot of "Temperature (°C)" vs "Time". A callout box points to the plot with the text "Real-Time View".
- Statistics:** A large callout box displays the current temperature: "[0] 25.34 °C".

SPECIFICATIONS

Product Identification	
Product Name	SITE-LOG
Model	LPV-1/LPVB-1
Inputs	
Connections	Pluggable terminal block for seven external channels, excitation controls and alarm outputs.
Channels	One on-board thermistor temperature (-40°C ~ 70°C, -40°F ~ 158°F). Seven external Voltage DC. Software programmable input range selections for each channel: 0 ~ 20 V, 0 ~ 10 V, 0 ~ 5 V, 0 ~ 2 V
Resolution	0.0018%
Accuracy	Thermistor channel: +/- 0.2°C(0°C ~ 70°C, 32°F ~ 158°F) For LPV-1: ± 0.15% @ 25°C from 0.1V and up ± 0.5% @ 25°C from 0 – 0.1V For LPVB-1: ± 0.05% FSR @ 25°C for 20V, 10V, 5V channels, ± 0.1% FSR @ 25°C for 2V channel
Input Impedance:	> 1 MOhms
Over-voltage protection	+/- 40 VDC
Alarms	
Channel Alarms	Two editable alarm thresholds per channel.
Alarm Outputs	ALARM1 & A2/EXT terminal strips can be configured as alarm outputs. Alarm-On: MOSFET(N-Channel) switch on. Alarm-Off: MOSFET(N-Channel) switch off. Max Power: 200mA @ 24VDC. With purchase of SiteView software, the Site-Log can report alarm status to host PC via USB, Modem or Ethernet Device Server.
Alarm-On Delay:	Programmable 0 - 10 minutes delay with 1-minute increments.
Alarm Indicator	On-board LED lights in red when in alarm condition.
On-board Memory	
Capacity	4 Mega bytes (2 Mega measurements).
Data Retention	Over 20 years.
Sampling and Logging	
Sampling Interval	20 milliseconds to 12 hours user selectable ^[1]
Logging Mode	Stop recording or FIFO when memory is full.
Logging Activation	Programmable instant, start delay or field push-button activation.
Communications	
Interface	USB(USB cable included). AUX(RJ11) for direct TTL level communications. With purchase of DeviceServer Kit, the Site-Log logger can be connected to Ethernet for remote access.
Baud Rate	Auto-detect baud rate from 2400 to 115200 bps on both USB and AUX ports.
Battery	
Power	Built-in 3.6V Lithium Battery.
Life Cycle	10 years based on 1 minute sampling interval.
Software	
SiteView ^[2]	Configuration, downloading, plotting, real-time view, custom calibration and custom equation.

Software Requirements	Computer with 1.0 GHz or faster processor 256 MB Memory or higher 1.0 GB of available hard-drive space or higher Windows XP with SP2 or later, Vista, Window 7 At least one USB port or one COM port
Physical	
Material	Aluminum enclosure.
PCB Treatment	Conformal coating.
Dimension	88 X 64.2 X 24 mm (3.46 X 2.53 X 0.95 inches)
Weight	200g.
Mounting	Probe/Wall-mount holes for hanging/mounting.
Others	
LED Indicator	Tri-Color LED: (can be disabled for power saving) Normal Sampling: green when sampling Alarm: red when sampling Low Battery: amber when sampling.
Excitation Control	A2/EXT terminal strip can be configured as excitation control output for driving the power of connected devices. Warm-up delay Interval settings: 10 to 240 seconds with 10-second increments.
Operating Environment	-40 ~ +70°C (-40°F ~ 158°F), 0~95%RH non-condensing.
Clock Accuracy	± 1 minute per month.
Approvals	CE, FCC

[1]: Maximum enabled channel: 1 for 20ms interval, 2 for 30ms, 8 for 40ms or bigger interval. External power supply required if the sampling interval is less than five seconds.

[2]: Sold separately.

LOGGING CAPACITY TABLE

Sampling Interval	Enabled Channel	Logging Capacity	Sampling Interval	Enabled Channel	Logging Capacity
1 minute	1	3.98 years	1 second	1	24 days
1 minute	2	727 days	1 second	2	12 days
1 minute	8	181 days	1 second	8	3 days
10 seconds	1	242 days	100 ms	1	58 hours
10 seconds	2	121 days	100 ms	2	29 hours
10 seconds	8	30 days	100 ms	8	7.2 hours